

canter level side sealing machines with patented film feed system

Excitement never ends. Star will win you over at first glance. More charm, less consumption. The thrill of an evolution that respects tradition. Progress and emotion, versatility and speed in the first canterlevel side sealing wrapper that works with center folded and flat film. PATENTED AND EXCLUSIVE SYSTEM.

>> general features

Patented system: first machine in the world able to work with center folded and flat film in the same machine. intermittent and box motion : output up to 120 pcs/min film. can work with all kind of film. Film saving & wonderful bag result: tight and beautiful. Canter level structure that allows an easy cleaning and accessibility of the machine, great in the Food Industry as it can work with BARRIER film also in Modified Atmosphere MAP. Stainless steel version available can be combined with a canter level shrink tunnel with opening chamber.


>> specific features

Patented system: first machine in the world able to work with center folder and flat film in the same machine. Available in 2 versions intermittent and box motion : output up to 120 pcs/min film: poliolefine, polypropylene, BOPP, PE, Barrier Film. Film saving: no more than 1 cm waste film tight bag as in a flowpack machine. And optional: patented saving energy system with siemens-50% of machine consumption saved. Canterlever shrink tunnel with movable and opening shrink tunnel. Canterlever additional in feed belt. Available also in stainless steel version

>> details



Tighter & wonderful bags, perfect for pre printed film.

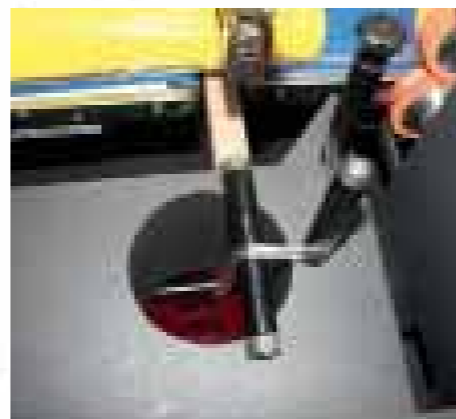

Less consumption, less waste, Film economy.




Film dispenser unit that can work both with Center Folded and Flat film. Patented system.




Reduced space between the side sealing and the product, to save 10 cm of side film.



Easy change of format: center sealing and triangle-inverting head motorised. Height up 400 mm.

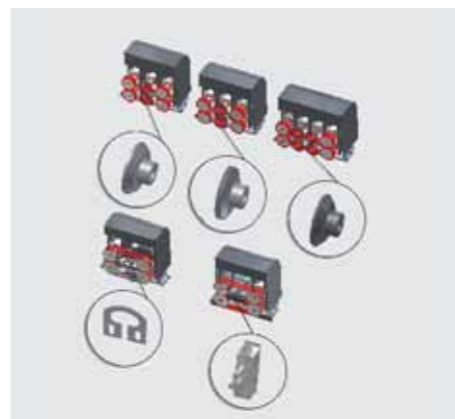

Flexibility: optional side sealing and transversal sealing system for all kind of films.

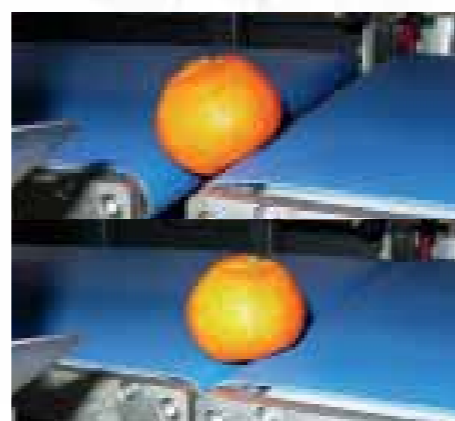

Kissing belt mounted as standard in all our machines to pack smaller and round /irregular shape products.



Stainless steel version available .



High quality components , ISO certified.

STAR/VO/2014 - rettangolare.it

canter level side sealing machines

>> STAR


PREFERRED PACKAGING ITALY
leader in the manufacturing packaging equipment

**DM
PACK**

GB

STAR

canter level side sealing machines

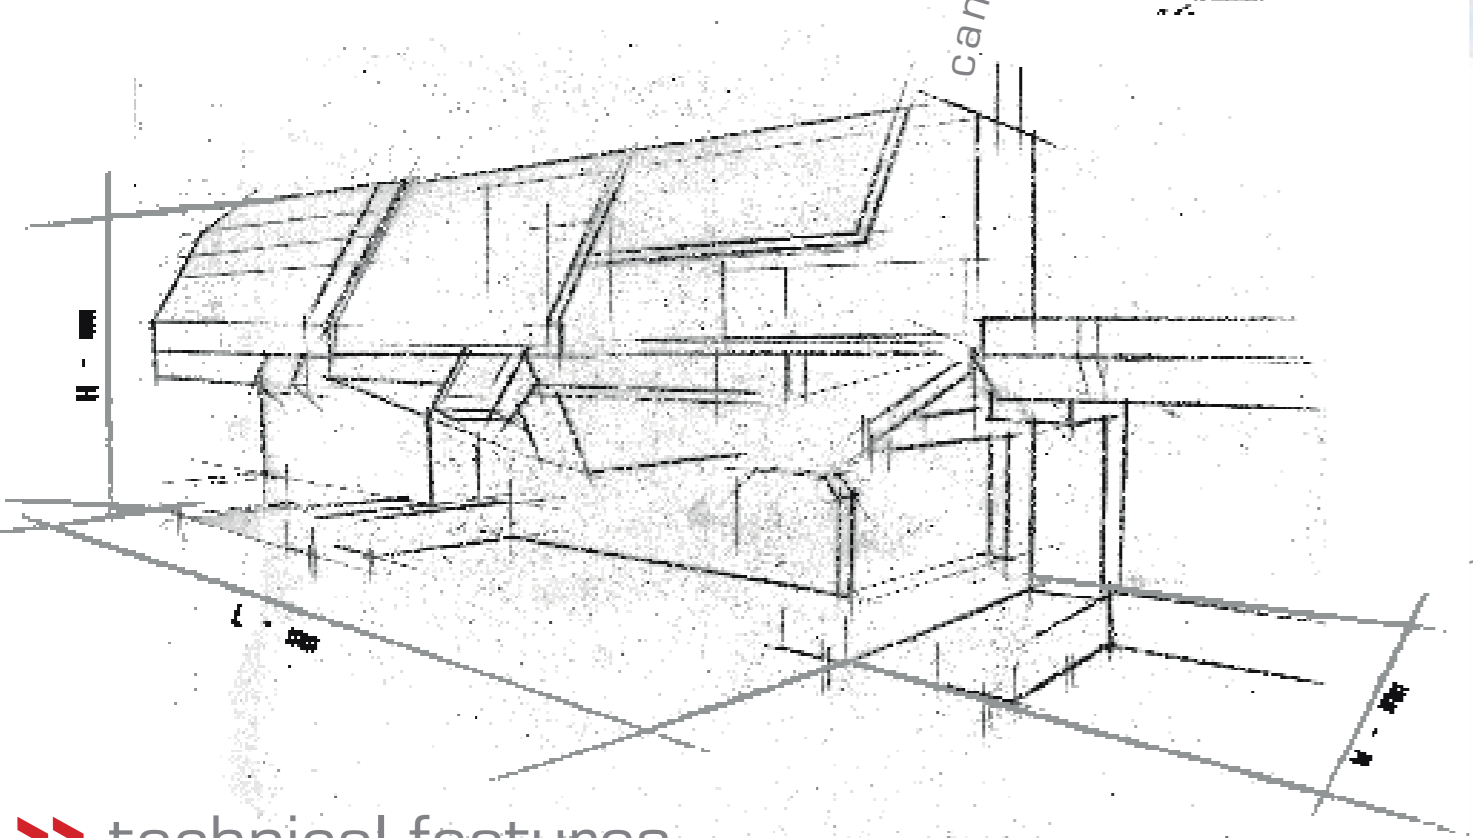

>> technical features

| MOD. | 500 | 500I | 600 | 600I |
|---|------------------------|-----------|------------------------|-----------|
| Sealing dimensions | 500 mm | 500 mm | 600 mm | 600 mm |
| Max product width | 400 mm | 4000 mm | 500 mm | 500 mm |
| Max product length | unlimited | unlimited | unlimited | unlimited |
| Max product height | 200 mm | 200 mm | 200 mm | 200 mm |
| Film width (center Folded & Flat Film sizes) | 650 mm | 650 mm | 750 mm | 750 mm |
| Reel diameter | 350 mm | 350 mm | 350 mm | 350 mm |
| Working height | 900+/- 50 | 900+/- 50 | 900+/- 50 | 900+/- 50 |
| Machine weight | 800 Kg | 800 Kg | 800 Kg | 800 Kg |
| Speed | 100 p/min - box motion | 75 p/min | 100 p/min - box motion | 75 p/min |
| Speed - fast version | 120 p/min | | box motion | |

>> The wrapping machine can be combined with our shrink tunnels standard or canter level, openable tunnels

>> The flexibility of a 3 belts side sealing machine joins the possibility to work with BOTH CENTER FOLDED & flat film in order to obtain a tighter and wonderful package.



>> Position of the Center sealing & inverting head adjustable by the touch screen with motors. Product's height up: 400 mm. Siemens touch screen. with 30 different programs . Easy set up.

>> Accessible canter level structure, completely open : perfect for food Industry. Stainless steel version available.

>> PATENTED ROTARY film DISPENSER UNIT can work on the same unit with flat or center folded film.